



# Keurig B60 Puncture Needle Replacement

This guide demonstrates how to remove and replace a clogged or damaged puncture needle.

Written By: Jake Wynn



## INTRODUCTION

Replacing the Puncture Needle is similar to the Handle Replacement, but requires a couple extra steps outlined below.

---



### TOOLS:

- [T15 Torx Screwdriver](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Handle



- Lift the handle

## Step 2



- Locate and remove the two 9.5 mm Torx T15 screws on both sides of the handle.

## Step 3



- Remove the broken handle and replace with the new one

## Step 4 — Puncture Needle



- Locate and remove the two 9.5 mm Phillips #1 screws.
- Remove the plastic ring around the K-Cup Pack Holder




## Step 5




- Remove the two 9.5 mm Phillips #1 screws on the underside of the lid.

## Step 6

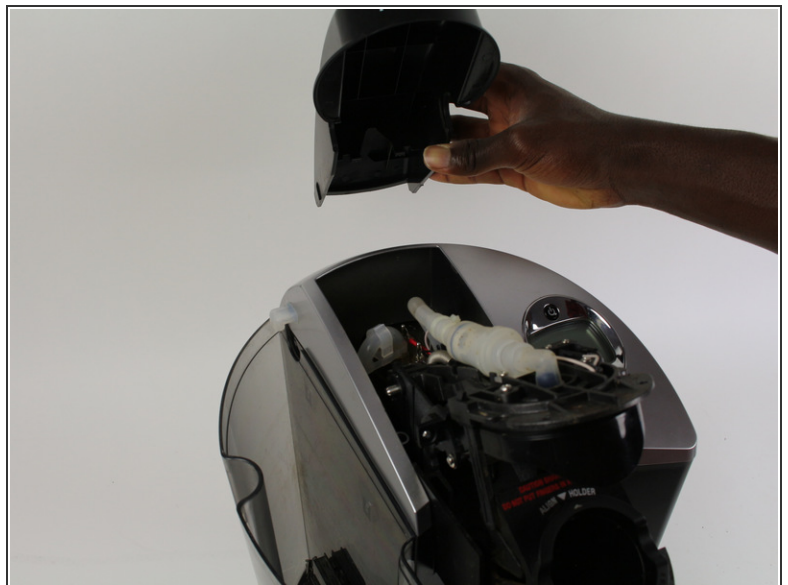



- Detach the lid from the Keurig.

## Step 7

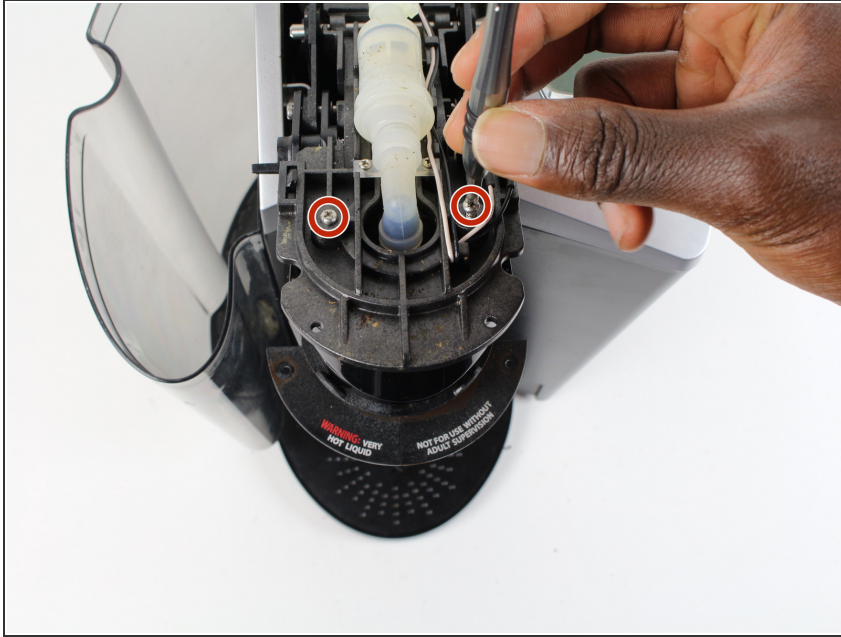

- Locate and remove the two 9.5 mm Phillips #1 screws on the top of the puncture needle.

## Step 8

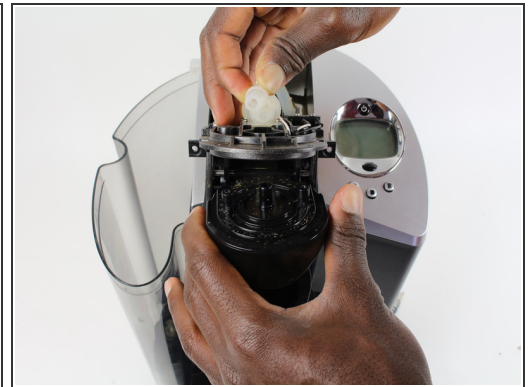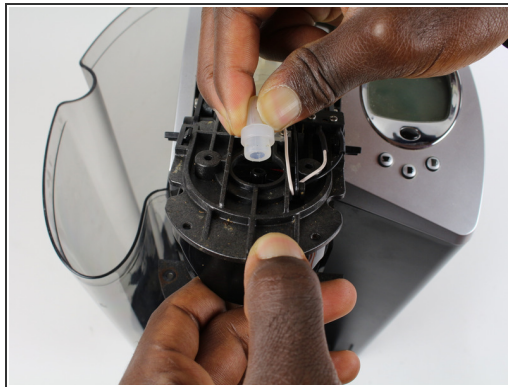

- Squeeze and pull on the hose to remove it from the Puncture Needle
- Puncture needle should now be exposed

## Step 9



- Remove the Puncture Needle Assembly from Keurig

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-28 08:36:58 PM.